

RM600HE-90S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module

RM600HE-90S




- IF600A
- VRRM 4500V
- Insulated Type
- 1-element in a Pack
- AISiC Baseplate

APPLICATION

Traction drives, High Reliability Converters / Inverters, DC choppers

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

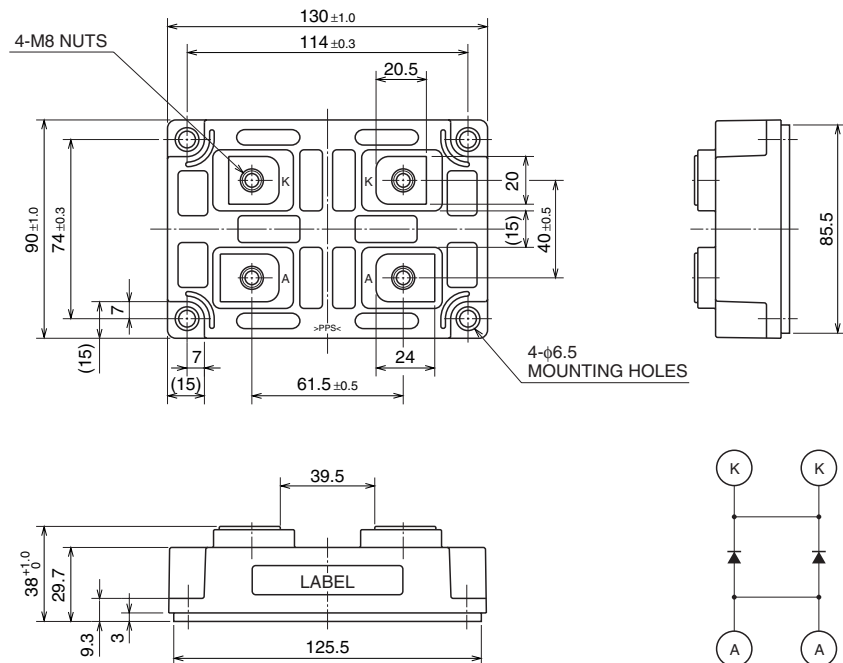

CIRCUIT DIAGRAM

High Voltage Diode Module

May 2009

RM600HE-90S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module

MAXIMUM RATINGS

Symbol	Item	Conditions	Ratings	Unit
VRRM	Repetitive peak reverse voltage	T _j = 25 °C	4500	V
VRSM	Non-repetitive peak reverse voltage	T _j = 25 °C	4500	V
VR(DC)	Reverse DC voltage	T _j = 25 °C	3000	V
I _F	DC forward current	T _c = 25 °C	600	A
I _{FSM}	Surge forward current	T _j = 25 °C start, t _w = 8.3 ms Half sign wave	4800	A
I ² t	Current-squared, time integration	T _j = 25 °C start, t _w = 8.3 ms Half sign wave	95.6	kA ² s
V _{iso}	Isolation voltage	Charged part to the baseplate RMS sinusoidal, 60Hz 1min.	6000	V
T _j	Junction temperature	—	−40 ~ +150	°C
T _{op}	Operating temperature	—	−40 ~ +125	°C
T _{stg}	Storage temperature	—	−40 ~ +125	°C

ELECTRICAL CHARACTERISTICS

Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
IRRM	Repetitive reverse current	V _{RM} = VRRM	T _j = 25 °C	—	5	mA
			T _j = 125 °C	—	30	
V _{FM}	Forward voltage (Note 1)	I _F = 600 A	T _j = 25 °C	—	4.80	V
			T _j = 125 °C	—	4.20	
t _{rr}	Reverse recovery time	V _R = 2250 V, I _F = 600 A di/dt = −1400 A/μs L _s = 100nH, T _j = 125 °C	—	0.9	1.8	μs
I _{rr}	Reverse recovery current		—	615	—	A
Q _{rr}	Reverse recovery charge		—	600	—	μC
E _{rec}	Reverse recovery energy (Note 2)		—	0.62	—	J/P

Note 1. It doesn't include the voltage drop by internal lead resistance.

2. E_{rec} is the integral of 0.1V_R × 0.1I_{rr} × dt.

High Voltage Diode Module

May 2009

RM600HE-90S

HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module



THERMAL CHARACTERISTICS

Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
$R_{th(j-c)}$	Thermal resistance	Junction to case	—	—	39.0	K/kW
$R_{th(c-f)}$	Contact thermal resistance	Case to Fin, $\lambda_{grease} = 1W/m \cdot K$ $D(c-f)=100\mu m$	—	15.0	—	K/kW

MECHANICAL CHARACTERISTICS

Symbol	Item	Conditions	Limits			Unit
			Min	Typ	Max	
M_t	Mounting torque	M8: Main terminals screw	6.67	—	13.0	N·m
M_s		M6: Mounting screw	2.84	—	6.0	N·m
m	Mass	—	—	0.66	—	kg

PERFORMANCE CURVES

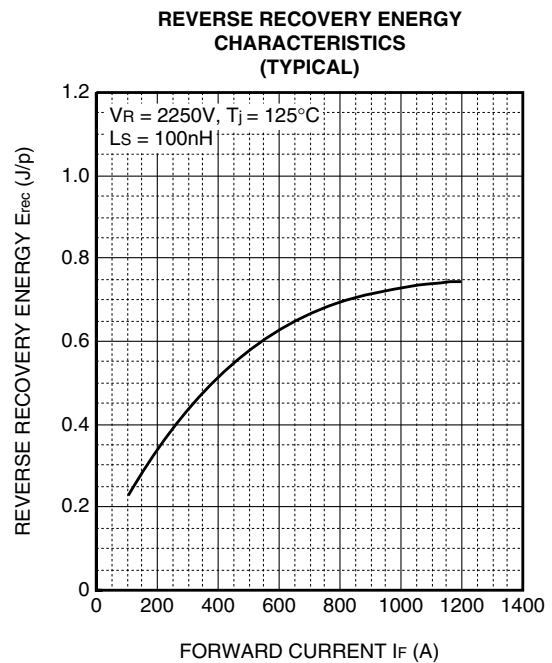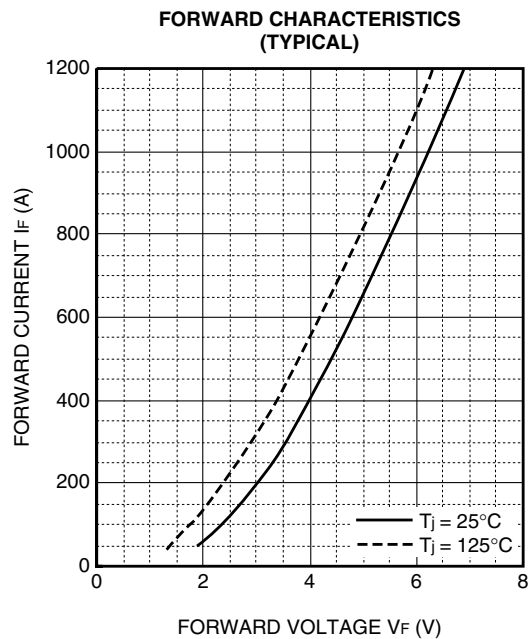


High Voltage Diode Module

RM600HE-90S


HIGH POWER SWITCHING USE
INSULATED TYPE

High Voltage Diode Module


REVERSE RECOVERY
CHARACTERISTICS
(TYPICAL)

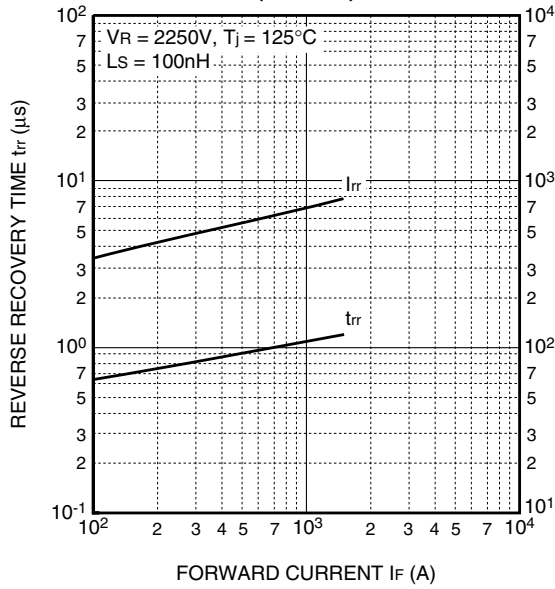

REVERSE RECOVERY
SAFE OPERATING AREA
(RRSOA)

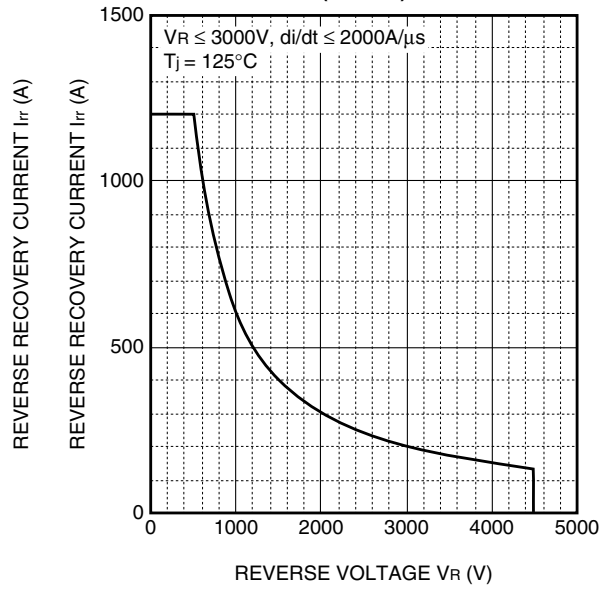

TRANSIENT THERMAL IMPEDANCE
CHARACTERISTICS

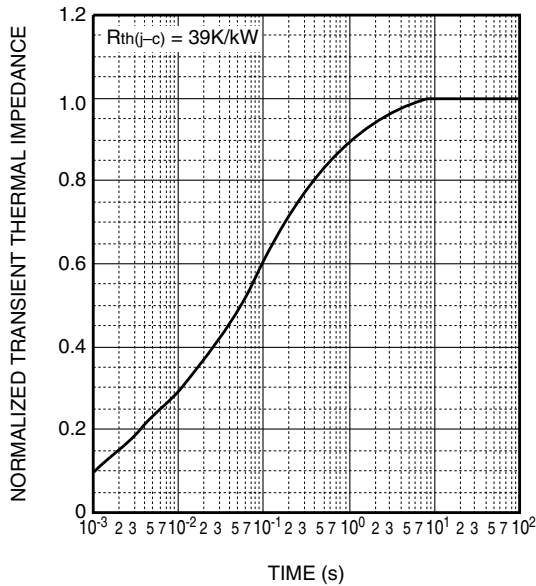

High Voltage Diode Module

May 2009